




## Floor Scale *FSB C*

M

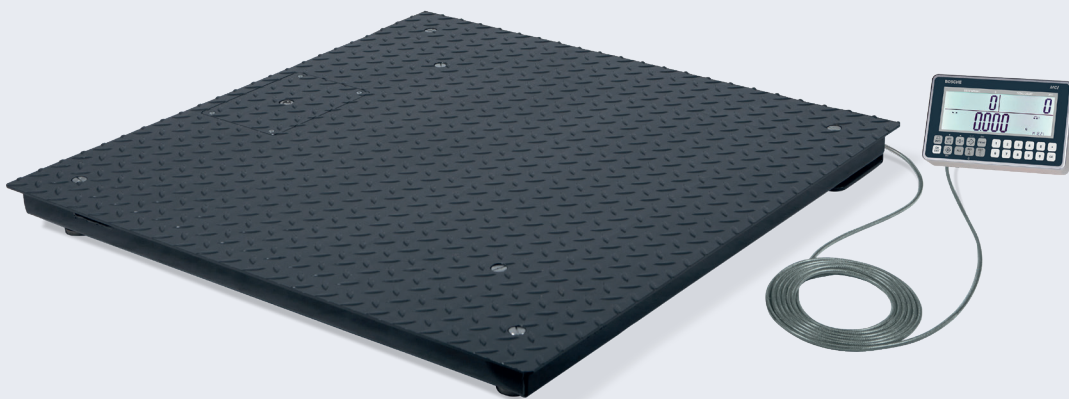

### Features

- ▶ Extra sturdy construction (only 80 mm)
- ▶ Weighing bridge made of powder-coated channelled sheet steel, with ramps (optional)
- ▶ Capacity: 600 kg / 1500 kg / 3000 kg
- ▶ Standard sizes:  
1000 x 1000 mm / 1200 x 1200 mm  
1200 x 1500 mm / 1500 x 1500 mm
- ▶ Four laser-welded stainless steel load cells, IP 68
- ▶ Load cells and cabling installed inside the platform for extra protection
- ▶ Adjustable feet and spirit level allow for accurate alignment of the bridge
- ▶ Heavy-duty industrial plug, fully encased
- ▶ Easy access to junction box and plugs from top
- ▶ Suitable for installation with ramps or in pit frame
- ▶ Top-quality shielded data cable
- ▶ Display can be disconnected from bridge even with calibrated weighing systems
- ▶ Legal for trade according to accuracy class III
- ▶ Scale display MCI-T (verifiable) and GTC-T (non-verifiable) in aluminium housing
- ▶ Basic functions: Tare across 100 % of weighing range, zero, gross/net, manual tare
- ▶ Totalisation of weights and quantities
- ▶ Variable reference quantity with reference updating to optimise the counting accuracy
- ▶ Three illuminated displays - weight, piece weight and quantity
- ▶ Audible signal when a target quantity is exceeded
- ▶ Numeric keypad for entering piece weights, tare weights and target quantities
- ▶ Various interfaces for printer, hand-held scanner or PC
- ▶ Alibi memory with date and time
- ▶ Shipped with table and wall mount as standard
- ▶ Connection of a reference scale possible

## Floor Scale *FSB C*

### Bosche Floor Scales series FSB MC

The floor scales of the BOSCHE FSB range are ideally suited for use in harsh industrial environments. FSB C is a powerful floor-counting scale, which is suitable for complex counting applications and fast counting of parts with equal weight. You can determine unknown quantities, check known quantities and commission.

#### Construction

Three installation options: On-floor installation, On-floor installation with ramps, In-floor installation. Made of powder-coated channelled sheet steel. The platforms are fitted with four laser-welded high-quality DMS load cells, IP 68.

### Weighing technology - Legal for trade

The FSB MW floor scale is verifiable in accordance with the requirements of the International Organisation for Legal Metrology (OIML) and meets the guidelines of accuracy class III. Alibi memory module for verifiable storage data.










#### Power Supply and Interfaces

By default, the indicator is powered via an AC adapter or the internal battery. The RS 232 interface allows a bidirectional data transfer of weight data to a PC, printer or remote display.

#### Optional accessories

Access ramp for floor scales, Bumper guard for floor scales, Second Display, Printer, RS232-Interface, Stand, Accumulator

### ► TECHNICAL DETAILS

| Type (Non calibratable)  | Capacity             | Readability of the scale, d | Standard sizes |
|--|----------------------|-----------------------------|----------------|
| FSB 1010 GTC-T 0,6<br>FSB 1010 GTC-T 1,5t  | 600 kg<br>1.500 kg   | 100 g<br>200 g              | 1000 x 1000 mm |
| FSB 1212 GTC-T 1,5t<br>FSB 1212 GTC-T 3,0t   | 1.500 kg<br>3.000 kg | 200 g<br>500 g              | 1200 x 1200 mm |
| FSB 1215 GTC-T 1,5t<br>FSB 1215 GTC-T 3,0t   | 1.500 kg<br>3.000 kg | 200 g<br>500 g              | 1200 x 1500 mm |
| FSB 1515 GTC-T 1,5t<br>FSB 1515 GTC-T 3,0t   | 1.500 kg<br>3.000 kg | 200 g<br>500 g              | 1500 x 1500 mm |
| FSB 1520 GTC-T 3,0t  | 3.000 kg             | 500 g                       | 1500 x 2000 mm |
| Type (Calibratable)  | Capacity             | Calibration value, e        | Standard sizes |
| FSB 1010 MCI-T 0,6t <br>FSB 1010 MCI-T 1,5t  | 600 kg<br>1.500 kg   | 200 g<br>500 g              | 1000 x 1000 mm |
| FSB 1212 MCI-T 1,5t <br>FSB 1212 MCI-T 3,0t  | 1.500 kg<br>3.000 kg | 500 g<br>1000 g             | 1200 x 1200 mm |
| FSB 1215 MCI-T 1,5t <br>FSB 1215 MCI-T 3,0t  | 1.500 kg<br>3.000 kg | 500 g<br>1000 g             | 1200 x 1500 mm |
| FSB 1515 MCI-T 1,5t <br>FSB 1515 MCI-T 3,0t  | 1.500 kg<br>3.000 kg | 500 g<br>1000 g             | 1500 x 1500 mm |
| FSB 1520 MCI-T 3,0t   | 3.000 kg             | 1000 g                      | 1500 x 2000 mm |

